

Curtain Header Dock Seals



Curtain Header Dock Seals by McGuire accommodate a variety of truck heights while conserving energy and protecting your products and personnel from the elements. Curtain type seals offer an economical means of providing a tight seal between the building and truck.

They consist of two vertical side pads and a full width curtain and are suitable for use on door openings to 10'-0" high. The curtain incorporates a horizontal support member at the top and a weighted lower edge for stability. Grommets and shock cords are provided to secure the curtain in position.

DURAPLEAT® PROTECTORS (OPTIONAL)

McGuire offers replaceable independent wear surfaces which completely cover the vertical front sections of the dock seals in an overlapping pattern and extend seal life. They offer additional protection from the abrasive action of truck motion, sharp hinges, gutters and broken lights. They can also be added to existing units of any make without disassembly.

MODELS

TS 163

TS 173

TS 183

TS 193

MCGUIRE

SPECIFICATIONS

Curtain Header Dock Seals

MODELS TS 163, TS 173, TS 183, TS 193-8 & -10

Loading Dock Seals shall be Model TS _____ as manufactured by W.B. McGuire Co., Inc., Hudson, New York to fit door opening _____ W x _____ H. Side pads shall be _____ long and head curtain drop _____". Unit projection _____". Seal covers shall encapsulate the foam core and fasten to a 2" solid wood backing. Side pads shall have a 3" wide contrasting guide stripe. The head curtain shall have a wood nailer to secure to the building, an enclosed rod to span the side pads for support, and weighted curtain edge with grommets and shock cords to position the curtain. Mounting brackets for installation shall be provided by the manufacturer.

Options: Provide protective wear surface (Durapleat® style _____) for the vertical pad surface to absorb abrasion.

Project Details:

- Door opening _____ W x _____ H
- Dock height _____"
- Platform or bumper projection _____"
- Distance between doors _____
- Approach: _____ Level
 _____ Incline: % Slope _____
 _____ Decline: % Slope _____

Special Information _____

Door Seal Details:

- Quantity _____
- Model _____
- Projection _____"
- Bevel-shaped side pads:
 Front _____" to Rear _____"
- Tapered-shape side pads:
 Top _____" to Bottom _____"
- Durapleat® protector, style _____ DP4 - 4" Exposure
 _____ DP8 - 8" Exposure
 _____ DP16 - 16 1/2" Exp.

Project Information

Job Name _____
 Address _____
 General Contractor _____
 McGuire Distributor _____
 Salesperson _____

Construction Approval

Company _____
 Address _____
 By _____
 Date _____
 Quantity _____

W.B. McGuire Co., Inc.


One Hudson Avenue
 Hudson, New York 12534
 (518) 828-7652
 Fax: (518) 828-1262
 Toll Free: 1-800-McGuire
 (1-800-624-8473)

A Division of Overhead Door Corporation

McGUIRE

COVER MATERIAL

TS 163	TF099™, 40-oz., Color: Black
TS 173	Hypalon® 16-oz., Color: Green
TS 183	Vinyl, 22-oz., Colors: Green, Beige, Black, Blue, Brown
TS 183-H	Vinyl, 40-oz., Colors: Green, Beige, Black, Blue, Brown
TS 193	Neoprene 45-oz., Color: Black

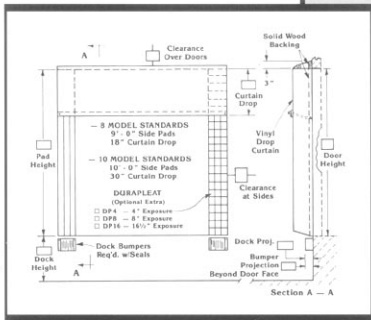

The specifications described herein were in effect at time of printing. However, W. B. McGuire Company, Inc. reserves the right to change specifications and designs, or to discontinue models at any time without incurring obligation.

Hypalon® is a registered trademark of E.I. DuPont Co., Inc. Durapleat® is a registered trademark of W. B. McGuire Co., Inc. TF-099™ is a trademark of W.B. McGuire Co., Inc.

Represented By: